

HORMISAC H-25

VISANSEC



Prepared dry concrete H-25.

APPLICATIONS

- Dry cement specially designed for constructions of small proportions where high resistance is required with difficult to no access for cement trucks.
- For interior and exterior floors, exterior use on skirting.
- Used for filling, terraces, and skirting.

SUPPORTS

- The support should be resistant, level, and clean.
- The support should be absorbent.
- Control the humidity of the support, if necessary, wet surface before application.

DIRECTIONS FOR USE

- Mix with clean water by hand or machine to obtain a paste that is clump free, with 10% water (approx. 2.0 - 2.25 L/sack)
- Mix for a minimum of 5 minutes.
- Once mixed the product will last up to 90 minutes.

COLOUR

Grey.

MANDATORY GUIDELINES

- Do not use in extreme temperatures, under 5°C or above 30°C.
- Do not apply in direct sunlight, strong winds, under rain, or freezing conditions.
- During the hotter season the product has a faster drying time, if necessary wet surface prior to application.
- Use indicated amount of water.
- Use cure concrete by spray irrigation or using surface curators.
- The consistency of the mixed product will be soft with rocks between 6 - 9 cm round.
- Do not alternate the composition of the mixture by adding other products or cements.

CONSERVATION / STORAGE

- Store in dry place within closed original packaging up to 12 months after date of fabrication.


PRESENTATION

- Plastificated paper sack of 25Kg.
- Pallets of 1,400Kg (56 sacks)



PHYSICAL AND CHEMICAL PROPERTIES

Classification EHE-08	H-25
Appearance	Grey powder
Water to mixture	9 ± 1 % (2 – 2.5 l/sack)
Duration of mixture	90 min.
Density of mixture	2.35 ± 0.1 g/cm ³
Barren Granulation	< 8 mm.
Drying	from 12 to 24 hr
Density of final product	17 ± 1 Kg / m ²
Consistency with Abrams	soft
Compression resistance	25 N/mm ²
Fireproof	A1
Chlorides	≤ 0.01 %

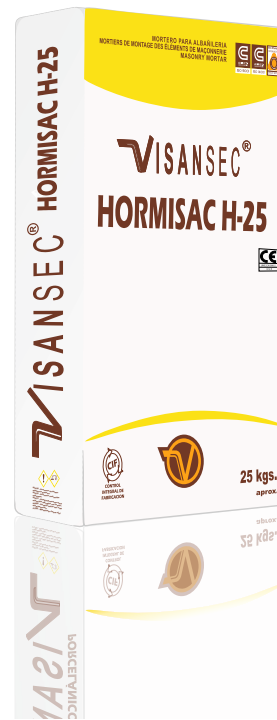

HORMISAC H-25


SAFETY DETAILS

- This product is classified as an irritant.
- For more information consult Safety Details Chart of the product.



TECHNICAL DATA

- Type: **Dry Cement H-25**
- Composition: **Grey cement, selected barren, and additives.**
- Water to mixture: **9% ± 1%**
- Consistency with Abrams: **BLANDA**

 Año: 06	Reference Law: EHE 08 Type of Mortar: Dry Cement: H-25 Intended uses: Small surfaces.											
	<table border="1"> <thead> <tr> <th>Declared Values</th> <th colspan="2">Test</th> </tr> </thead> <tbody> <tr> <td>Compression Resistance:</td> <td>UNE EN - 998-2</td> <td>25 N/mm²</td> </tr> <tr> <td>Fireproof:</td> <td>UNE EN - 998-2</td> <td>A 1</td> </tr> <tr> <td>Chlorides:</td> <td>UNE EN - 998-2</td> <td>≤ 0.01%</td> </tr> </tbody> </table>	Declared Values	Test		Compression Resistance:	UNE EN - 998-2	25 N/mm ²	Fireproof:	UNE EN - 998-2	A 1	Chlorides:	UNE EN - 998-2
Declared Values	Test											
Compression Resistance:	UNE EN - 998-2	25 N/mm ²										
Fireproof:	UNE EN - 998-2	A 1										
Chlorides:	UNE EN - 998-2	≤ 0.01%										

