


# ENLOSAR M2,5

VISANSEC

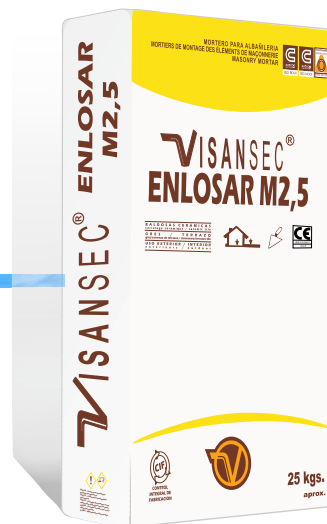

**Cement mortar for general use type M 2,5.**

### APPLICATION

- Specially designed for bases for floors.
- For exterior use on floors.
- Used for pieces of all weights, reduced format that uses joint paving machine.

### SUPPORTS

- The support should be resistant, level, and clean.
- The support should be absorbent.
- Control the humidity of the support, if necessary, wet surface before application..

### DIRECTIONS FOR USE

- Mix with clean water by hand or machine to obtain a paste that is clump free, with 11% + 1% water ( approx. 2.75 + 0.25 L/sack)
- Let set 5 minutes then continue application.
- Once mixed the product will last up to 30 minutes, if remixed it will last up to 2 hours.

### COLOUR

- Grey.

### PERFORMANCE

- 18 Kg/m2. ± 1 Kg/m2.

### MANDATORY GUIDELINES

- Do not use in extreme temperatures, under 5°C or above 30°C.
- Do not apply in direct sunlight, strong winds, under rain, or freezing conditions.
- During the hotter season the product has a faster drying time, if necessary wet surface prior to application.
- Use indicated amount of water.
- For terrace lying apply a layer of Pavicem-200 between the mortar and tiles.
- Wait 48 after laying base to proceed to lay ceramic or porcelain tiles, use a cement based mortar to secure tiles.

### CONSERVATION / STORAGE

- Store in dry place within closed original packaging up to 12 months after date of fabrication.


### PRESENTATION

- Plastificated paper sack of 25Kg.
- Pallets of 1,400Kg (56 sacks)



## PHYSICAL AND CHEMICAL PROPERTIES

Classification UNE EN 998-2	M 2,5
Appearance	Polvo gris
Water to mixture	11 ± 1 % ( 2.5 – 3 l/saco)
Density of mixture	2.25 ± 0.1 g/cm3
Density of final product	2.15 ± 0.1 g/cm3
Barren granulation	hasta 4 mm.
Performance (10 mm thick)	18 Kg / m2
Chlorides	≤ 0.01%
Efficiency of capillaries	PND
Retraction	PND
Compression resistance	> 2.5 N/mm2
Mixture duration	>30 min.
Fireproof	A1

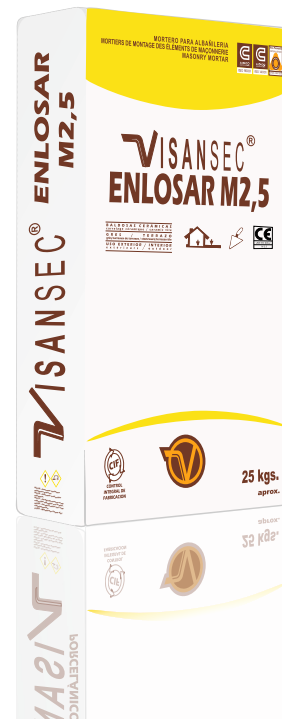


## SAFETY DETAILS

- This product is classified as an irritant.
- For more information consult Safety Details Chart of the product.



## TECHNICAL DATA

- Type: **General construction mortar(G) M 2,5.**
- Composition: **Grey cement and sand.**
- Water to mixture: **11% ± 1%**
- Performance: **18 Kg/m<sup>2</sup> X 10 mm. thick max.**

 Año: 06	Reference law: EN 998-2 Type of mortar: Building mortar: M 2,5 Intended uses: Current: G Water absorption: PND									
	<table border="1"> <thead> <tr> <th>Declared Values</th> <th>Test</th> </tr> </thead> <tbody> <tr> <td>Compression resistance:</td> <td>UNE EN - 998-2 6 N/mm<sup>2</sup></td> </tr> <tr> <td>Fluctuation resistance:</td> <td>UNE EN - 998-2 0.15 N/mm<sup>2</sup></td> </tr> <tr> <td>Waterproof to water vapor:</td> <td>UNE EN - 998-2 μ15/35</td> </tr> <tr> <td>Thermal conduction:</td> <td>UNE EN - 998-2 1,17 w/mK</td> </tr> </tbody> </table>	Declared Values	Test	Compression resistance:	UNE EN - 998-2 6 N/mm <sup>2</sup>	Fluctuation resistance:	UNE EN - 998-2 0.15 N/mm <sup>2</sup>	Waterproof to water vapor:	UNE EN - 998-2 μ15/35	Thermal conduction:
Declared Values	Test									
Compression resistance:	UNE EN - 998-2 6 N/mm <sup>2</sup>									
Fluctuation resistance:	UNE EN - 998-2 0.15 N/mm <sup>2</sup>									
Waterproof to water vapor:	UNE EN - 998-2 μ15/35									
Thermal conduction:	UNE EN - 998-2 1,17 w/mK									

