


# JUNTEADOR PISCINAS - FUNGICIDA

## VISANJUNTEX

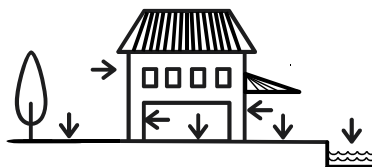

### Characteristics

Specially designed for joints from 2 to 10 mm in floors and wall coverings of vitrified ceramic mosaics, such as glass tiles and other lightweight mosaics, in pools, shower trays, and other areas in constant contact with water.

Available in white, with the option to manufacture in any color from our color chart.

All our joints feature a water-repellent effect and do not undergo volume changes after application.

### Applications

Suitable for indoor, outdoor, and humid environments. Offers good workability and ease of cleaning.

### Storage

The product should be stored in its original packaging and kept in a dry place, allowing it to be stored for at least two years.

### Presentation

Heat-sealed 5 kg bags. Box of 6 bags (30 kg). Pallet of 40 boxes.

### Instructions for use

- Knead by hand or with a machine at low speed until achieving a smooth, consistent, and lump-free texture.
  - Do not apply in extreme temperatures, below 5°C or above 30°C.
  - Let rest for 5 minutes, then stir and apply.
  - Preferably apply with a rubber trowel or spatula.
  - Fill the joint, ensuring the surface is as compact and uniform as possible.
  - Once the initial gloss disappears, remove any excess product, ideally with a damp sponge.
  - Perform final cleaning once the joint has hardened.
  - Ensure the substrate is clean, free of laitance and release agents.
  - Do not apply on wet surfaces or those with loose parts.
  - Avoid applying in extreme weather conditions.
  - Wait time for finishing: 20 - 30 minutes.
  - Ready for use after 24 hours (48 hours for tanks and pools).
  - Walkability: approximately 3 hours.
- Jointing after installation:
- For walls bonded with standard adhesive: 4 - 8 hours.
  - For walls bonded with quick-setting adhesive: 1 - 2 hours.
  - For walls with mortar: 2 - 3 days.
  - For floors bonded with standard adhesive: 24 hours.
  - For floors bonded with quick-setting adhesive: 3 - 4 hours.
  - For floors with mortar: 7 - 10 hours.

### PHYSICAL AND CHEMICAL PROPERTIES

Classification according to UNE EN 12888	CG 2 W A
Appearance	White or colored powder
Mixing Water	30 ± 1 %
Bulk Density in Powder Form	1,2 g/cm <sup>3</sup>
Bulk Density in Paste Form	1,6 g/cm <sup>3</sup>
Abrasion Resistance (UNE-EN 12808-2)	≤ 900 mm <sup>3</sup>
Compression Strength (UNE-EN 12808-3)	≥ 15 N/mm <sup>2</sup>
Flexural Strength (UNE-EN 12808-3)	≥ 3,5 N/mm <sup>2</sup>
Shrinkage Determination (UNE-EN 12808-4)	≤ 2 mm/m
Water absorption at 30 min (UNE-EN 12828-5)	≤ 2 g
Water absorption at 240 min (UNE-EN 12808-5)	≤ 5 g
Yield	0,3 - 0,4 (Kg/m <sup>2</sup> )
Working Time of Paste**	Approx. 60 min

\* Test conducted on a 1 mm thickness, depending on the joint width.

\*\* Test conducted under normal environmental conditions of 23°C and 55% relative humidity. Test conducted on a surface with a thickness of 5 mm.

Tile Format	Yield		
	2 mm	3 mm	5 mm
15 x 15	0.25	0.37	0.62
15 x 20	0.21	0.31	0.52
20 x 20	0.19	0.28	0.47

