

# TABICAR

VISANSEC



**Cement based mortar type M5 specially designed for esthetic viewing,**

## APPLICATION

- Binding cement mortar specially designed for esthetic view.
- For interior and exterior use on walls.
- Used for pieces of all weights, reduced format that uses joint paving machine.

## SUPPORTS

- The support should be resistant, level, and clean.
- The support should be absorbent.
- Control the humidity of the support, if necessary, wet surface before application.

## DIRECTIONS FOR USE

- Mix with clean water by hand or machine until achieving a paste that is clump free, with 22% + 2% water ( approx. 5-6 L/sack)
- Let set 5 minutes then continue application.
- Apply mix over the set piece until desired thickness, afterwards place new piece on top and apply pressure until obtaining the desired location.
- Once mixed the product will last up to 2 hours

## COLOR

Gris .



## MANDATORY GUIDELINES

- Do not use in extreme temperatures, under 5°C or above 30°C.
- Do not apply in direct sunlight, strong winds, under rain, or freezing conditions.
- During the hotter season the product has a faster drying time, if necessary wet surface prior to application.
- Use indicated amount of water.
- The thickness of the joints should be between 10 - 15mm.
- With highly absorbent pieces it may be necessary to wet before application.
- Do not wet waterproof pieces under any circumstances.

## CONSERVATION / STORAGE

- Store in dry place within closed original packaging up to 12 months after date of fabrication.

## PRESENTATION

- 50Lt Plastic sacks.
- Pallets of 40 sacks.

## PERFORMANCE

- 18 Kg/m2. for 9cm. bricks



## PHYSICAL AND CHEMICAL PROPERTIES

Classification UNE EN 998-2	M 5
Appearance	Coloured Powder
Water to mix	22 ± 2 % ( 5 – 6 l/sack )
Densit of mixture	2.2 ± 0.1 g/cm3
Density of powder	1.6 ± 0.1 g/cm3
Density of final product	1.8 ± 0.1 g/cm3
Performance (9 cm.bricks)	18 Kg / m2
Retraction	PNDG
Compression resistance	> 5 N/mm2
Fireproof	A1




## SAFETY DETAILS

- This product is classified as an irritant.
- For more information consult the Product Safety Chart.



## TECHNICAL DATA

- Type: **Brick laying cement M5**
- Composition: **Grey cement, stones, and additives.**
- Water to mixture: **22% ± 2%**
- Performance: **18 Kg/m<sup>2</sup> for 9 cm brick**

 Año: 06	Norma de referencia: EN 998-2 Tipo de mortero: construction mortar: M5 Usos previstos: Construction mortar designed for joints and thin layers (T) Absorción de agua: ≤ 0,4 kg/m <sup>2</sup> (M5)																
	<table border="1"> <thead> <tr> <th>Declared Values</th> <th>Tests</th> </tr> </thead> <tbody> <tr> <td>Compression Resistance</td> <td>&gt;5 N/mm<sup>2</sup></td> <td>UNE EN - 998-2</td> </tr> <tr> <td>Fluctuation Resistance</td> <td>0.30 N/mm<sup>2</sup></td> <td>UNE EN - 998-2</td> </tr> <tr> <td>Waterproof to vapor</td> <td>μ15/35</td> <td>UNE EN - 998-2</td> </tr> <tr> <td>Thermal Conduction</td> <td>0,83 w/mK</td> <td>UNE EN - 998-2</td> </tr> <tr> <td>Durability: Freezing/Defrosting cycles:</td> <td>PND</td> <td>UNE EN - 998-2</td> </tr> </tbody> </table>	Declared Values	Tests	Compression Resistance	>5 N/mm <sup>2</sup>	UNE EN - 998-2	Fluctuation Resistance	0.30 N/mm <sup>2</sup>	UNE EN - 998-2	Waterproof to vapor	μ15/35	UNE EN - 998-2	Thermal Conduction	0,83 w/mK	UNE EN - 998-2	Durability: Freezing/Defrosting cycles:	PND
Declared Values	Tests																
Compression Resistance	>5 N/mm <sup>2</sup>	UNE EN - 998-2															
Fluctuation Resistance	0.30 N/mm <sup>2</sup>	UNE EN - 998-2															
Waterproof to vapor	μ15/35	UNE EN - 998-2															
Thermal Conduction	0,83 w/mK	UNE EN - 998-2															
Durability: Freezing/Defrosting cycles:	PND	UNE EN - 998-2															



MORTERO TABICAR M5

## MORTERO BLOQUE HORMIGON

**VISANSEC**



**Cement mortar specially desinged for building cement block walls.**

### APPLICATIONS

- Cement mortar specially designed for laying cement blocks, lattices, etc...
- For exterior use on walls.
- Used for pieces of all weights, reduced format that uses joint paving machine.
- Variety of colours.

### SUPPORTS

- The support should be resistant, level, and clean.
- The support should be absorbent.
- Control the humidity of the support, if necessary, wet surface before application.

### DIRECTIONS FOR USE

- Mix with clean water by hand or machine to obtain a paste that is clump free, with 22% + 2% water ( approx. 5-6 L/sack)
- Let set 5 minutes then continue application.
- Apply mix over the set piece until desired thickness, afterwards place new piece on top and apply pressure until obtaining the desired location.
- Once mixed the product will last up to 2 hours.

### COLOUR

Grey / Coloured

### RENDIMIENTO

- 15kg/m2 for blocks of 20x40cm



### MANDATORY GUIDELINES

- Do not use in extreme temperatures, under 5°C or above 30°C.
- Do not apply in direct sunlight, strong winds, under rain, or freezing conditions.
- During the hotter season the product has a faster drying time, if necessary wet surface prior to application.
- Use indicated amount of water.
- The thickness of the joints should be between 10 - 15mm.
- With highly absorbent pieces it may be necessary to wet before application. Do not wet waterproof pieces under any circumstances.
- To correct the position of any piece, there is a 5 minute window. For waterproof pieces there is a 15 minute window.

### CONSERVATION / STORAGE

- Store in dry place within closed original packaging up to 12 months after date of fabrication.


### PRESENTATION

- Plastificated paper sack of 25Kg.
- Pallets of 1,400Kg (56 sacks)



## PHYSICAL AND CHEMICAL PROPERTIES

Classification UNE EN 998-2	M 5
Appearance	Coloured Powder
Water to mixture	22 ± 2 % ( 5 – 6 l/sack )
Density of mixture	2.2 ± 0.1 g/cm3
Density of powder	2.0 ± 0.1 g/cm3
Density of final product	1.9 ± 0.1 g/cm3
Performance (9 cm. esthetic blocks)	15 Kg / m2
Retraction	PND
Compression resistance	> 5 N/mm2
Fireproof	A1
Granulation	Up to 2.5 mm.

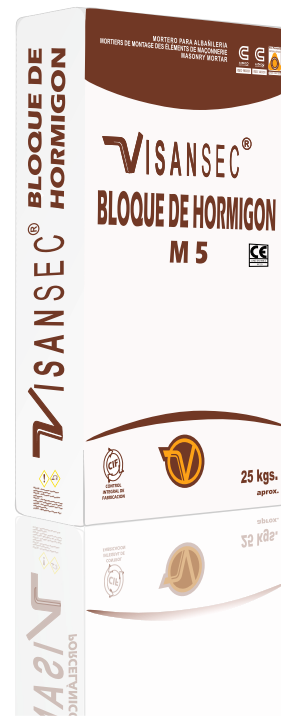


## SAFETY DETAILS

- This product is classified as an irritant.
- For more information consult the Product safety chart.



## TECHNICAL DATA

- Type: **Brick laying cement mortar M5**
- Composition: **Grey cement, selected barrens, additives.**
- Water to mixture: **22% ± 2%**
- Performance: **15 Kg/m<sup>2</sup> for blocks 20x40 cm.**

 Año: 06	Reference law: EN 998-2 Type of mortar: Mortero de albañilería: M5 Intended uses: Mortero de albañilería diseñado para juntas y capas finas (T) Absorción de agua: ≥ 0.3 Kg/m2 min0.5 (W1)											
	<table border="1"> <thead> <tr> <th>Declared Values</th> <th>Tests</th> </tr> </thead> <tbody> <tr> <td>Compression Resistance: &gt;5 N/mm<sup>2</sup></td> <td>UNE EN - 998-2</td> </tr> <tr> <td>Fluctuation Resistance: 0.30 N/mm<sup>2</sup></td> <td>UNE EN - 998-2</td> </tr> <tr> <td>Waterproof to water vapor: μ15/35</td> <td>UNE EN - 998-2</td> </tr> <tr> <td>Conductividad térmica: 1,17 w/mK</td> <td>UNE EN - 998-2</td> </tr> <tr> <td>Durability: Freezing/Defrosting: PND</td> <td>UNE EN - 998-2</td> </tr> </tbody> </table>	Declared Values	Tests	Compression Resistance: >5 N/mm <sup>2</sup>	UNE EN - 998-2	Fluctuation Resistance: 0.30 N/mm <sup>2</sup>	UNE EN - 998-2	Waterproof to water vapor: μ15/35	UNE EN - 998-2	Conductividad térmica: 1,17 w/mK	UNE EN - 998-2	Durability: Freezing/Defrosting: PND
Declared Values	Tests											
Compression Resistance: >5 N/mm <sup>2</sup>	UNE EN - 998-2											
Fluctuation Resistance: 0.30 N/mm <sup>2</sup>	UNE EN - 998-2											
Waterproof to water vapor: μ15/35	UNE EN - 998-2											
Conductividad térmica: 1,17 w/mK	UNE EN - 998-2											
Durability: Freezing/Defrosting: PND	UNE EN - 998-2											



# ENLOSAR M2,5

VISANSEC



## Cement mortar for general use type M 2,5.

### APPLICATION

- Specially designed for bases for floors.
- For exterior use on floors.
- Used for pieces of all weights, reduced format that uses joint paving machine.

### SUPPORTS

- The support should be resistant, level, and clean.
- The support should be absorbent.
- Control the humidity of the support, if necessary, wet surface before application..

### DIRECTIONS FOR USE

- Mix with clean water by hand or machine to obtain a paste that is clump free, with 11% + 1% water ( approx. 2.75 + 0.25 L/sack)
- Let set 5 minutes then continue application.
- Once mixed the product will last up to 30 minutes, if remixed it will last up to 2 hours.

### COLOUR

- Grey.

### PERFORMANCE

- 18 Kg/m2. ± 1 Kg/m2.

### MANDATORY GUIDELINES

- Do not use in extreme temperatures, under 5°C or above 30°C.
- Do not apply in direct sunlight, strong winds, under rain, or freezing conditions.
- During the hotter season the product has a faster drying time, if necessary wet surface prior to application.
- Use indicated amount of water.
- For terrace lying apply a layer of Pavicem-200 between the mortar and tiles.
- Wait 48 after laying base to proceed to lay ceramic or porcelain tiles, use a cement based mortar to secure tiles.

### CONSERVATION / STORAGE

- Store in dry place within closed original packaging up to 12 months after date of fabrication.

### PRESENTATION

- Plastificated paper sack of 25Kg.
- Pallets of 1,400Kg (56 sacks)



## PHYSICAL AND CHEMICAL PROPERTIES

Classification UNE EN 998-2	M 2,5
Appearance	Polvo gris
Water to mixture	11 ± 1 % ( 2.5 – 3 l/saco)
Density of mixture	2.25 ± 0.1 g/cm3
Density of final product	2.15 ± 0.1 g/cm3
Barren granulation	hasta 4 mm.
Performance (10 mm thick)	18 Kg / m2
Chlorides	≤ 0.01%
Efficiency of capillaries	PND
Retraction	PND
Compression resistance	> 2.5 N/mm2
Mixture duration	>30 min.
Fireproof	A1




## SAFETY DETAILS

- This product is classified as an irritant.
- For more information consult Safety Details Chart of the product.



## TECHNICAL DATA

- Type: **General construction mortar(G) M 2,5.**
- Composition: **Grey cement and sand.**
- Water to mixture: **11% ± 1%**
- Performance: **18 Kg/m<sup>2</sup> X 10 mm. thick max.**

 Año: 06	Reference law: EN 998-2 Type of mortar: Building mortar: M 2,5 Intended uses: Current: G Water absorption: PND									
	<table border="1"> <thead> <tr> <th>Declared Values</th> <th>Test</th> </tr> </thead> <tbody> <tr> <td>Compression resistance:</td> <td>UNE EN - 998-2 6 N/mm<sup>2</sup></td> </tr> <tr> <td>Fluctuation resistance:</td> <td>UNE EN - 998-2 0.15 N/mm<sup>2</sup></td> </tr> <tr> <td>Waterproof to water vapor:</td> <td>UNE EN - 998-2 μ15/35</td> </tr> <tr> <td>Thermal conduction:</td> <td>UNE EN - 998-2 1,17 w/mK</td> </tr> </tbody> </table>	Declared Values	Test	Compression resistance:	UNE EN - 998-2 6 N/mm <sup>2</sup>	Fluctuation resistance:	UNE EN - 998-2 0.15 N/mm <sup>2</sup>	Waterproof to water vapor:	UNE EN - 998-2 μ15/35	Thermal conduction:
Declared Values	Test									
Compression resistance:	UNE EN - 998-2 6 N/mm <sup>2</sup>									
Fluctuation resistance:	UNE EN - 998-2 0.15 N/mm <sup>2</sup>									
Waterproof to water vapor:	UNE EN - 998-2 μ15/35									
Thermal conduction:	UNE EN - 998-2 1,17 w/mK									



# UNIVERSAL M5

## VISANSEC



### UNIVERSAL cement mortar type M 5.

#### APPLICATION

- Specially designed for securing ceramic bricks of any format and cement block walls.
- For interior and exterior walls.
- Can also be used manually as a cement render and coating

#### SUPPORTS

- The support should be resistant, level, and clean.
- The support should be absorbent.
- Control the humidity of the support, if necessary, wet surface before application.

#### DIRECTIONS FOR USE

- Mix with clean water by hand or machine to obtain a paste that is clump free, with 14% + 2% water ( approx. 3.5 + 0.5 L/sack)
- Let set 5 minutes then continue application.
- Once mixed the product will last up to 30 minutes, if remixed it will last up to 2 hours.

#### COLOUR

- Grey

#### MANDATORY GUIDELINES

- Do not use in extreme temperatures, under 5°C or above 30°C.
- Do not apply in direct sunlight, strong winds, under rain, or freezing conditions.
- During the hotter season the product has a faster drying time, if necessary wet surface prior to application.
- Use indicated amount of water.
- For rodded or cement rendered bases it is necessary to wait 28 days before applying the finishing layer.

#### CONSERVATION / STORAGE

- Store in dry place within closed original packaging up to 12 months after date of fabrication.

#### PRESENTATION

- Plastificated paper sack of 25Kg.
- Pallets of 1,400Kg (56 sacks)

#### PERFORMANCE

- 18 Kg/m<sup>2</sup>. ± 1 Kg/m<sup>2</sup>.



## PHYSICAL AND CHEMICAL PROPERTIES

Classification UNE EN 998-2	M 5
Appearance	Grey Powder
Water to mixture	14 ± 2 % ( 3.0 – 4.0 l/saco )
Density of mixture	2.01 ± 0.1 g/cm3
Density of final product	1.95 ± 0.1 g/cm3
Barren granulation	< 4 mm.
Performance (10 mm espesor)	18 Kg / m2
Chlorides	≤ 0.01%
Efficiency of capillaries	PND
Retraction	< 2 mm/m
Compression resistance	> 5 N/mm2
Duration of mixture	>30 min.
Fireproof	A1



## SAFETY DETAILS

- This product is classified as an irritant.
- For more information consult Safety Details Chart of the product.



## DATOS TÉCNICOS

- Type: **Building mortar UNIVERSAL(G) M5.**
- Composition: **Grey cement, selected barrens, additives.**
- Water to mixture: **14% ± 2%**
- Performance: **18 Kg/m<sup>2</sup> por 10 mm. de espesor máximo**

CE Año: 06	Reference law:	EN 998-2
	Type of mortar:	Mortero de albañilería: M5
	Intended uses:	Corriente: G Absorción de agua: PND
Declared Values		Test
Compression resistance:	UNE EN - 998-2	>5 N/mm <sup>2</sup>
Fluctuation resistance:	UNE EN - 998-2	0.15 N/mm <sup>2</sup>
Waterproof of water vapor:	UNE EN - 998-2	μ15/35
Thermal Conductivity:	UNE EN - 998-2	1,17 w/mK



# MULTIUSOS M7,5

**VISANSEC**



**MULTIPURPOSE cement mortar type M 7,5.**

## APPLICATION

- Cement mortar fabricated for ceramic brick walls of any kind and laying concrete blocks.
- For interior and exterior use on walls.
- Valid for all pieces of all weights, reduced format that requires joint paving machine.

## SUPPORTS

- The support should be resistant, level, and clean.
- The support should be absorbent.
- Control the humidity of the support, if necessary, wet surface before application.

## DIRECTIONS FOR USE

- Mix with clean water by hand or machine to obtain a paste that is clump free, with 15% + 1% water ( approx. 3.75 + 0.25 L/sack)
- Let set 5 minutes then continue application.
- Once mixed the product will last up to 30 minutes, if remixed it will last up to 2 hours.

## COLOUR

- Grey.

## MANDATORY GUIDELINES

- Do not use in extreme temperatures, under 5°C or above 30°C.
- Do not apply in direct sunlight, strong winds, under rain, or freezing conditions.
- During the hotter season the product has a faster drying time, if necessary wet surface prior to application.
- Use indicated amount of water.
- To use this product of rodded or plastered walls it is necessary to allow 28 days to settle before applying the final layer.

## CONSERVATION / STORAGE

- Store in dry place within closed original packaging up to 12 months after date of fabrication.

## PRESENTATION

- Plastificated paper sack of 25Kg.
- Pallets of 1,400Kg (56 sacks)

## PERFORMANCE

- 18 Kg/m2. ± 1 Kg/m2.



## PHYSICAL AND CHEMICAL PROPERTIES

Classification UNE EN 998-2	M 7,5
Appearance	Polvo gris
Water to mixture	15 ± 1 % ( 3.5 – 4.0 l/saco )
Density of mixture	2.0 ± 0.1 g/cm3
Density of final product	1.8 ± 0.1 g/cm3
Barren granulation	< 1.8 mm.
Performance(10 mm thick)	18 Kg / m2
Chlorides	≤ 0.01%
Efficiency of capillaries	PND
Retraction	< 2 mm/m
Compression resistance	> 7,5 N/mm2
Duration of mixture	>30 min.
Fireproof	A1




## SAFETY DETAILS

- This product is classified as an irritant.
- For more information consult Product Safety Chart.



## TECHNICAL DATA

- Type: **General use cement mortar(G) M7,5.**
- Composition: **Grey cement, selected barrens, and additives.**
- Water to mixture: **15% ± 1%**
- Performance: **18 Kg/m<sup>2</sup> por 10 mm. de espesor máximo**

 Año: 06	Reference law: EN 998-2 Type of mortar: Building mortar: M7,5 Intended uses: Current: G Water absorption: PND									
	<table border="1"> <thead> <tr> <th>Declared Values</th> <th>Test</th> </tr> </thead> <tbody> <tr> <td>Compression resistance:</td> <td>UNE EN - 998-2 &gt;7.5 N/mm<sup>2</sup></td> </tr> <tr> <td>Fluctuation resistance:</td> <td>UNE EN - 998-2 0.15 N/mm<sup>2</sup></td> </tr> <tr> <td>Waterproof to water vapor:</td> <td>UNE EN - 998-2 μ15/35</td> </tr> <tr> <td>Thermal conductivity:</td> <td>UNE EN - 998-2 1.17 w/mK</td> </tr> </tbody> </table>	Declared Values	Test	Compression resistance:	UNE EN - 998-2 >7.5 N/mm <sup>2</sup>	Fluctuation resistance:	UNE EN - 998-2 0.15 N/mm <sup>2</sup>	Waterproof to water vapor:	UNE EN - 998-2 μ15/35	Thermal conductivity:
Declared Values	Test									
Compression resistance:	UNE EN - 998-2 >7.5 N/mm <sup>2</sup>									
Fluctuation resistance:	UNE EN - 998-2 0.15 N/mm <sup>2</sup>									
Waterproof to water vapor:	UNE EN - 998-2 μ15/35									
Thermal conductivity:	UNE EN - 998-2 1.17 w/mK									



# GUNITADOS MURO

**VISANSEC**



## PROJECTION cement mortar type MP20.

### APPLICATION

- Cement mortar designed for mechanical projection.
- Used for pool bases and canals.
- Indicate for leveling slopes and natural terrain.

### SUPPORTS

- The support should be clean and regulated.
- The support should be absorbent.
- Control the humidity of the support, if necessary, wet prior to application.

### DIRECTIONS FOR USE

- Mix with clean water manually or mechanically to obtain a paste free of clumps, with 10% water.
- The characteristics of the mortar can be improved by adding certain liquid additives to the mixture.

### COLOUR

- Grey.

### PERFORMANCE

- 17 Kg/m<sup>2</sup>. ± 1 Kg/m<sup>2</sup>.

### MANDATORY GUIDELINES

- Do not use in extreme temperatures, under 5°C or above 30°C.
- Do not apply in direct sunlight, strong winds, under rain, or freezing conditions.
- During the hotter season the product has a faster drying time, if necessary wet surface prior to application.
- Use indicated amount of water.
- Do not apply layers of thickness of no more than 4 - 5cm, for thickness apply in various layers.
- When projected on armor, avoid forming voids in the structure.
- Once applied, wet surface with water during the first 24 hours for correct curing.

### CONSERVATION / STORAGE

- Store in dry place within closed original packaging up to 12 months after date of fabrication.

### PRESENTATION

- Plastificated paper sack of 25Kg.
- Pallets of 1,400Kg (56 sacks)



## PHYSICAL AND CHEMICAL PROPERTIES


Classification UNE EN 998-2	MP 20
Appearance	Grey powder
Water to mixture	9 ± 1 % ( 2 – 2.5 l/saco )
Density of powder	1.8 ± 0.1 g/cm3
Density of mixture	2.0 ± 0.1 g/cm3
Barren Granulation	Up to 5 mm.
Performance (10mm thick)	17 ± 1 Kg / m2
Density of final product	1.9 ± 0.1 g/cm3
Retraction	PND
Compression resistance	> 5 N/mm2
Fireproof	A1



## SAFETY DETAILS

- This product is classified as an irritant.
- For more information consult Safety Details Chart of the product.



TECHNICAL DATA	
<ul style="list-style-type: none"> <li>• Type: <b>Projection cement mortar MP 20</b></li> <li>• Composition: <b>Grey cement, selected barrens, additives.</b></li> <li>• Water to mixture: <b>9% ± 1%</b></li> <li>• Performance: <b>17 Kg/m<sup>2</sup> por 10 mm. de espesor</b></li> </ul>	
 Año: 06	Reference law: EN 998-2 Type of mortar: Projection mortar: MP 20 Intended uses: Proyección
Declared Values	Tests
Compression resistance:	UNE EN - 998-2 20 N/mm <sup>2</sup>
Fireproof:	UNE EN - 998-2 A 1
Retraction:	UNE EN - 998-2 PND



# GUNITADOS MURO

# MORTERO PROYECCIÓN ENFOSCADOS M7,5

## PROYECCIÓN ENFOSCADOS M7,5

VISANSEC



**MULTIPURPOSE cement mortar type M 7,5.**

### APPLICATION

- Product designed for projection on walls and guided walls.
- Used interior and exterior.

### SUPPORTS

- The support should be resistant, level, and clean.
- The support should be absorbent.
- Control the humidity of the support, if necessary, wet surface before application.

### DIRECTIONS FOR USE

- Mix with clean water by hand or machine to obtain a paste that is clump free, with 15% + 1% water ( approx. 3.75 + 0.25 L/sack)
- Let set 5 minutes then continue application.
- Once mixed the product will last up to 30 minutes, if remixed it will last up to 2 hours.

### COLOUR

- Grey.

### MANDATORY GUIDELINES

- Do not use in extreme temperatures, under 5°C or above 30°C.
- Do not apply in direct sunlight, strong winds, under rain, or freezing conditions.
- During the hotter season the product has a faster drying time, if necessary wet surface prior to application.
- Use indicated amount of water.
- To use this product of rodded or plastered walls it is necessary to allow 28 days to settle before applying the final layer.

### CONSERVATION / STORAGE

- Store in dry place within closed original packaging up to 12 months after date of fabrication.

### PRESENTATION

- Plastificated paper sack of 25Kg.
- Pallets of 1,400Kg (56 sacks)

### PERFORMANCE

- 18 Kg/m<sup>2</sup>. ± 1 Kg/m<sup>2</sup>.



## PHYSICAL AND CHEMICAL PROPERTIES

Classification UNE EN 998-2	M 7,5
Appearance	Grey powder
Water to mixture	15 ± 1 % ( 3.5 – 4.0 l/saco )
Density of mixture	2.0 ± 0.1 g/cm3
Density of final product	1.8 ± 0.1 g/cm3
Barren granulation	< 1.8 mm.
Performance (10 mm thick)	18 Kg / m2
Chlorides	≤ 0.01%
Capillarity coefficient	PND
Retraction	< 2 mm/m
Compression resistance	> 7,5 N/mm2
Duration of mixture	>30 min.
Fireproof	A1

## SAFETY DETAILS

- This product is classified as an irritant.
- For more information consult the Product Safety Chart.



## TECHNICAL DATA

- Type: **Cement mortar for general use(G) M7.5.**
- Composition: **Grey cement, selected barren, and additives.**
- Water to mixture: **15% ± 1%**
- Performance: **18 Kg/m<sup>2</sup> x 10 mm. Thick max.**

	<b>Reference law:</b> EN 998-2 <b>Type of mortar:</b> Construction Mortar: M7.5 <b>Intended uses:</b> Current: G Water absorption: PND
	Afto: 06
Declared Values	Test
Compression resistance	UNE EN - 998-2 >7.5 N/mm <sup>2</sup>
Fluctuation Resistance	UNE EN - 998-2 0.15 N/mm <sup>2</sup>
Waterproof to water vapor	UNE EN - 998-2 μ15/35
Thermal conduction	UNE EN - 998-2 1,17 w/mK



 **VISANFER**

**MORTERO PROYECCIÓN ENFOSCADOS M7,5**



# HORMISAC H-25

**VISANSEC**



## Prepared dry concrete H-25.

### APPLICATIONS

- Dry cement specially designed for constructions of small proportions where high resistance is required with difficult to no access for cement trucks.
- For interior and exterior floors, exterior use on skirting.
- Used for filling, terraces, and skirting.

### SUPPORTS

- The support should be resistant, level, and clean.
- The support should be absorbent.
- Control the humidity of the support, if necessary, wet surface before application.

### DIRECTIONS FOR USE

- Mix with clean water by hand or machine to obtain a paste that is clump free, with 10% water ( approx. 2.0 - 2.25 L/sack)
- Mix for a minimum of 5 minutes.
- Once mixed the product will last up to 90 minutes.

### COLOUR

Grey.

### MANDATORY GUIDELINES

- Do not use in extreme temperatures, under 5°C or above 30°C.
- Do not apply in direct sunlight, strong winds, under rain, or freezing conditions.
- During the hotter season the product has a faster drying time, if necessary wet surface prior to application.
- Use indicated amount of water.
- Use cure concrete by spray irrigation or using surface curators.
- The consistency of the mixed product will be soft with rocks between 6 - 9 cm round.
- Do not alternate the composition of the mixture by adding other products or cements.

### CONSERVATION / STORAGE

- Store in dry place within closed original packaging up to 12 months after date of fabrication.


### PRESENTATION

- Plastificated paper sack of 25Kg.
- Pallets of 1,400Kg (56 sacks)



## PHYSICAL AND CHEMICAL PROPERTIES

Classification EHE-08	H-25
Appearance	Grey powder
Water to mixture	9 ± 1 % ( 2 – 2.5 l/sack )
Duration of mixture	90 min.
Density of mixture	2.35 ± 0.1 g/cm3
Barren Granulation	< 8 mm.
Drying	from 12 to 24 hr
Density of final product	17 ± 1 Kg / m2
Consistency with Abrams	soft
Compression resistance	25 N/mm2
Fireproof	A1
Chlorides	≤ 0.01 %

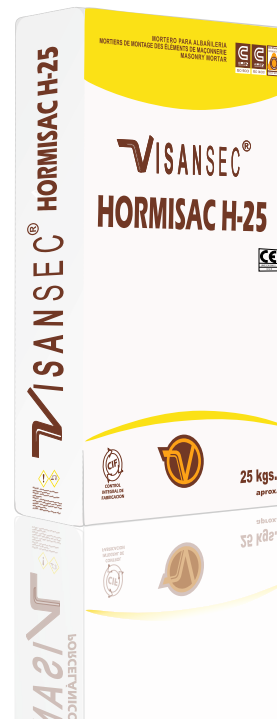

# HORMISAC H-25


## SAFETY DETAILS

- This product is classified as an irritant.
- For more information consult Safety Details Chart of the product.



## TECHNICAL DATA

- Type: **Dry Cement H-25**
- Composition: **Grey cement, selected barren, and additives.**
- Water to mixture: **9% ± 1%**
- Consistency with Abrams: **BLANDA**

 Año: 06	Reference Law: EHE 08 Type of Mortar: Dry Cement: H-25 Intended uses: Small surfaces.											
	<table border="1"> <thead> <tr> <th>Declared Values</th> <th colspan="2">Test</th> </tr> </thead> <tbody> <tr> <td>Compression Resistance:</td> <td>UNE EN - 998-2</td> <td>25 N/mm<sup>2</sup></td> </tr> <tr> <td>Fireproof:</td> <td>UNE EN - 998-2</td> <td>A 1</td> </tr> <tr> <td>Chlorides:</td> <td>UNE EN - 998-2</td> <td>≤ 0.01%</td> </tr> </tbody> </table>	Declared Values	Test		Compression Resistance:	UNE EN - 998-2	25 N/mm <sup>2</sup>	Fireproof:	UNE EN - 998-2	A 1	Chlorides:	UNE EN - 998-2
Declared Values	Test											
Compression Resistance:	UNE EN - 998-2	25 N/mm <sup>2</sup>										
Fireproof:	UNE EN - 998-2	A 1										
Chlorides:	UNE EN - 998-2	≤ 0.01%										



# PAVICEM 200



**White cement mortar for preparation of grouts.**

## APPLICATION

- It is a product especially suitable for the installation of interior floors as substitute for traditional grout.
- Because of its high performance, also it can be used in construction as white cement of low resistance.

## SUPPORTS

- The support should be resistant, level, and clean.
- The support should be absorbent.
- Control the humidity of the support, if necessary, wet surface before application.
- It is applied on fresh mortar screeds for laying floors.

## DIRECTIONS FOR USE

- Mix with clean water by hand or machine to obtain a paste that is clump free, with 38% water ( approx. 9 - 10 L/sack)
- Mix for a minimum of 5 minutes.
- Once mixed the product will last up to 2 hours.

## COLOUR

White

## MANDATORY GUIDELINES

- Do not use in extreme temperatures, under 5°C or above 30°C.
- Do not apply in direct sunlight, strong winds, under rain, or freezing conditions.
- During the hotter season the product has a faster drying time, if necessary wet surface prior to application.
- Use indicated amount of water.
- Do not use in exteriors.
- Do not use on plaster, plasterboard, or paint
- Do not use on supports that are affected by humidity.

## CONSERVATION / STORAGE

- Store in dry place within closed original packaging up to 12 months after date of fabrication.

## PRESENTAION

- Plastificated paper sack of 25Kg.
- Pallets of 1,400Kg (56 sacks)



## PHYSICAL AND CHEMICAL PROPERTIES

Classification	Pavicem 200
Appearance	White Powder
Water to mixture	38 ± 2 % ( 9 – 10 l/saco )
Duration of mixture	120 min.
Barren granulation	Up to 100 µm
Mixture consistency	FLUID
% Cement	35% Pavicem 200 - 70% Pavicem 400

## SAFETY DETAILS

- This product is classified as an irritant.
- For more information consult the Product Safety Chart.

